

55" Android Freestanding Advertising Displays

Jurrency Exchange

0

PR-T

SPIR

ASPIRE AIRPORT LOUNGE







Overview

Integrated Android Media Player

The integrated Android Media Player allows for super fast updates. If required you can also run third party Digital Signage software via the Android PC board.



Giant Tablet Styling

Designed to resemble a giant smartphone or tablet. The sleek and sexy look is achieved with a striking aluminium surround and stunning IPX1 rated edge-toedge glass.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 50,000 hours.

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos on a USB stick, insert in the display. Wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop



Network Upgrade

The screen can be upgraded to become a network screen that unlocks a host of new features including remote updates and multiple media zones.

IPS Panel NPS

With 450cd/m² the IPS panel shines brighter than any domestic television while delivering superior image quality and colour depth at 178° ultra wide viewing angle for portrait orientation.

Internal Locker

If you want to use the screen as a monitor you can attach devices via HDMI and VGA.



Commercial Grade

Designed for use in commercial applications this screen can run 24/7. No external buttons or controls to avoid tampering.

0

Free Integrated Castors

Designed with discreet retractable castors for easy manoeuvrability; once the screen is in position the wheels can be retracted.






Plug and Play

These displays have their own built in HD Android media player and require no additional hardware or software. Load your pictures and videos onto a USB stick, open the screen's locker door and insert the USB stick, this copies the files to the screen's internal memory. Once you remove the USB stick your pictures and videos will play in a continuous loop. It couldn't be simpler to get your content onto the screen.



Free Scheduling Software

You can update your screen by simply copying your images and videos directly onto your USB stick but if you have more complicated requirements you can use the free scheduling software that comes with the screen. This software allows you to display different content at certain times of the day, for example a restaurant could display breakfast menus in the morning, lunch menus in the afternoon and dinner menus in the evening. You can also set image duration and transition effects using this software.

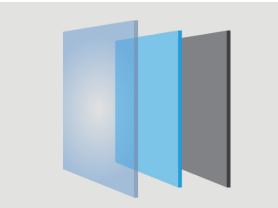

IPS Panel

Accurately displays an image's quality and colour depth at an 178° ultra wide viewing angle. There is no fall-off in colour accuracy and no diversion in contrast ratio at wide angles. From bright sunlight to the most challenging lighting environments these displays are designed to reproduce and maintain the ultimate colour temperature for lifelike images. The panel is also optimised for mounting in either landscape or portrait orientation.

24/7 USAGE

24/7 Commercial Use

A commercial grade panel, with a lifespan of 50,000 hours, and high quality components ensure that this display can be in constant use 24/7. Tablet-like styling is achieved thanks to their tempered glass front and robust steel enclosure, framed in an unpainted aluminium surround, unlike cheap imitations



Features

Free Integrated Castors



Integrated Castors are included with your screen at no extra cost, this means you have complete and manoeuvrable signage solution. The castors are retractable so the screen is stable when in the desired location.

Android Media Player



These screens are more easily updatable and faster than ever before. The Android PC board makes it easy to upgrade your screen to be networked. The Android Media Player also allows you to run 3rd party Digital Signage software.

Power Timer



This allows for reduced power usage by automatically powering off in hours that the displays are not required. You can set daily On/Off times for your displays. Attach External Devices



Should you need to run the screen from an external source, like a PC, you can do so by using the HDMI input or the VGA and 5mm audio jack inputs. There is also a space to fit a small PC or media player inside the lockable compartment.


LED Backlight



The LED backlight used is not only eco-friendly but also ensures the display has enhanced brightness and contrast. This technology increases the lifespan and reduces the power consumption by around 30%. This form of light technology is mercury free; safeguarding this screen's eco friendliness.




Network Upgrade For a small charge you can also upgrade your screen to be networked, allowing you to remotely update your screen via LAN, WiFi or 3G.

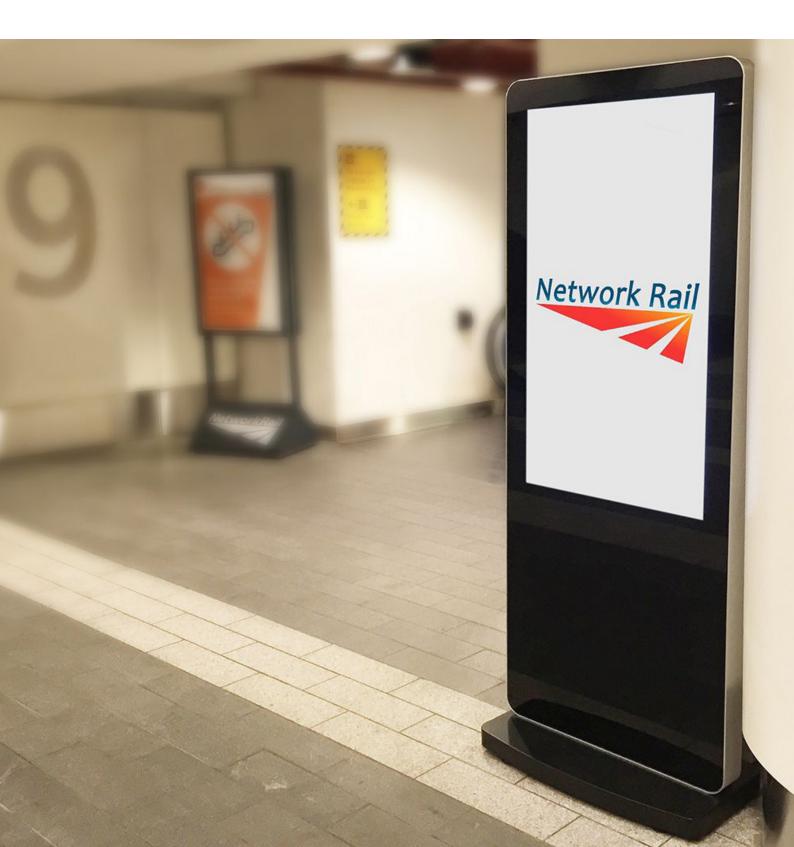


Brightness (cd/m2) 450 Colour 16.7M Viewing Angle 16.7M Contrast Ratio 4000.1 Audio Speaker Type 4000.1 Avige 4000.1 Audio Speaker Type 9000.1 AV Inputs 4000.1 4000.1 Avige HDMI, VGA Audio Scacker (5.6mm) 120 Power Power Consumption (W) 120 Inputs Actio Scacker (0.6mm) Power Consumption (W) 120 Intrixize (WxHxD mm) 813x400 Package Size (WxHxD mm) 990x2100x570 Package Size (WxHxD mm) 813x400 Neterbanical Footprint (WxH mm) Row Bight (kg) 120 Gross Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0°C to 50°C Storage Temperature 30°C to 50°C Operating Humidity 108 Kedia Format Video (MPG, AVI, MPA, RM, RMVB, TS), Audio (MPA, RMA, MA, Image (JPG, GIF, BMP, PNG) Media		Display Size		55 Inch
Aspect Ratio 16.9 Brightness (cd/m2) 450 Colour 16.7 M Viewing Angle 16.7 M Contrast Ratio 78° Audio Speaker Type Video 5W.80 (x2) Audio Speaker Type Video Modio Audio Video Audio Audio Socket (3 5mm) Power Input Voltage Input Voltage Audio Socket (3 5mm) Power Input Voltage Input Voltage Alton 200 (Solt-Solt)2) Net Weight (Kg) 120 Footprint (WXH mm) 990x2100x570 Net Weight (kg) 138 Net Weight (kg) 120 Gross Weight (kg) 138 Storage Temperatur 0° C to 50° C Operating Temperatur - 30°C to 60°C Operating Humidity 10% to 80% Storage Temperatur - 30°C to 60°C Operating Humidity 0 Internal Media Media Formatic Internal Memory <td< td=""><td rowspan="7">Panel</td><td colspan="2">Resolution</td><td>1080x1920</td></td<>	Panel	Resolution		1080x1920
Panel Bightness (cd/m2) 450 Colour 16.7M Viewing Angle 178* Contrast Ratio 4000:1 Audio Speaker Type Video 5W, 80, (x2) AV Inputs Video Avido Audio Sceet (3.5mm) Power Power Consumption (W) 120 Input Voltage AC110~240V (50Hz~60Hz) Power Consumption (W) 133 x1960x50 Package Size (WorkND mm) 910x2100x570 Package Size (WorkND mm) 910x2100x570 Poser Consweight (kg) 120 Rechanical Coperating Temperature Operating Temperature 0°C to 50 °C Storage Temperature 0°C to 50 °C Storage Temperature 0°C to 50 °C Computer Media Formats Video (MPG, AVI, MP4, RM, RMVP, TS), Audio (MP3, WMA), Image (JPC, GIF, BMP, PN6) Media Formats Video (MPG, AVI, MP4, RM, RMVP, TS), Audio (MP4, RMM, Minage (JPC, GIF, BMP, PN6) Media Formats Video (MPG, AVI, MP4, RM, RMVP, TS), Audio (MP4, RMM, Minage (JPC, GIF, BMP, PN6) Media Formats Video (M		Display Area (mm)		682.4x1211.6
Brightness (cd/m2) 450 Colour 16.7M Viewing Angle 16.7M Contrast Ratio 4000.1 Audio Speaker Type 4000.1 Avige 4000.1 Audio Speaker Type 9000.1 AV Inputs 4000.1 4000.1 Avige HDMI, VGA Audio Scacker (5.6mm) 120 Power Power Consumption (W) 120 Inputs Actio Scacker (0.6mm) Power Consumption (W) 120 Intrixize (WxHxD mm) 813x400 Package Size (WxHxD mm) 990x2100x570 Package Size (WxHxD mm) 813x400 Neterbanical Footprint (WxH mm) Row Bight (kg) 120 Gross Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0°C to 50°C Storage Temperature 30°C to 50°C Operating Humidity 108 Kedia Format Video (MPG, AVI, MPA, RM, RMVB, TS), Audio (MPA, RMA, MA, Image (JPG, GIF, BMP, PNG) Media		Aspect Ratio		16:9
Viewing Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 0400:1 Audio Speaker Type 050,80 (x2) AV Inputs 1000 1000 Audio Audio Socket (3.5mm) Power Consumption (W) 120 Inputs 0.4010-240V (50Hz~60Hz) Muchanical Package Size (WxHxD mm) Package Size (WxHxD mm) 990x2100x570 Package Size (WxHxD mm) 813x4900. Package Size (WxHxD mm) 813x400 Rootprint (WxH mm) 813x400 Rootprint (WxH mm) 813x400 Rootprint (WxH mm) 100 Rootprint (WxH mm) 103 Storage Temperature 0.°C to 50 °C Operating Temperature 0.°C to 50 °C Storage Temperature 0.°C to 50 °C Operating Temperature 0.°C to 50 °C Storage Temperature 0.°C to 50 °C Operating Humidity 6GB Internal Media Media Formats Video (MPG, AVI, MPA, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		Brightness (cd/m2)		450
Contrast Ratio 400:1 Audio Speaker Type 400:1 Audio Speaker Type 5W, 80 (x2) AV Inputs Audio Audio Audio Audio Audio Power Power Consumption (W) 120 Input Voltage AC110-240V (50Hz~60Hz) 120 Pokaçag Size (WxHxD mm) 813x1960x50 120 Packaçag Size (WxHxD mm) 813x1960x50 120 Pokaçag Size (WxHxD mm) 813x400 120 Pokaçag Size (WxHxD mm) 813x400 120 Net Weight (kg) 120 136 Operating Temperature 0°C to 50 °C 0°C Storage Temperature 0°C to 50 °C 136 Operating Humidity 10% to 80% 100 Storage Temperature 0°C to 50 °C 100 Operating Humidity 10% to 80% 100 Storage Temperature 0°C to 50 °C 100 Operating Humidity 10% to 95% 108 Storage Temperature 0°C to 50 °C 100		Colour		16.7M
Audio Speaker Type 5W.80 (x2) AV Inputs Yideo HDMI, VGA Audio Audio Socket (3.5mm) Power Power Consumption (W) 120 Input Voltage AC110-240V (50Hz~60Hz) Unit Size (WXHxD mm) 813x1960x50 Package Size (WKHxD mm) 813x1960x50 Pootprint (WxH mm) 813x400 Net Weight (kg) 120 Gross Weight (kg) 136 Porating Temperature 0 °C to 50 °C Storage Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Temperature -30°C to 50°C Storage Temperature -30°C to 50°C Storage Humidity 10% to 80% Storage Humidity 10% to 80% Computer Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Memory Internal Memory 6GB GPU QPU QPU QPU Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)		Viewing Angle		178°
AV Inputs Video HDMI, VGA Audio Audio Audio Socket (3.5mm) Power Power Consumption (W) 120 Input Voltage AC110-240V (50H2-60Hz) Unit Size (WXHxD mm) 813x1960x50 Package Size (WXHxD mm) 990x2100x570 Package Size (WXHxD mm) 990x2100x570 Mechanical Footprint (WXH mm) 813x400 Net Weight (kg) 120 Gross Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Resolution 1080x1920 Internal Media Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Media FMM Player GPU RAM 108DR3 ROM 08GB NAND US8 US82.0 HOST (x2)		Contrast Ratio		4000:1
AV Inputs Audio Audio Av dio Audio Audio Socket (3.5mm) Power 120 120 Input Voltage AC110-240V (50Hz~60Hz) 120 Mechanical Package Size (WxHxD mm) 813x1960x50 Package Size (WxHxD mm) 990x2100x570 100 Footprint (WxH mm) 813x400 100 Footprint (WxH mm) 813x400 100 Rechanical Footprint (WxH mm) 813x400 Net Weight (kg) 120 100 Gross Weight (kg) 120 100 Operating Temperature 0°C to 50°C 100 Operating Humidity 10% to 80% 100 Storage Humidity 5% to 95% 100 Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution Internal Media FOPU Duel-Core Cortex-A9 @1.6GHz GPU GPU Mali-400 MP4 @400MHz RAM 108 DDR3 ROM 108 DDR3 ROM 108 DDR3 ROM 10	Audio	Speaker Type		5W, 8Ω (x2)
Audio Audio Socket (3.5mm) Power Input Voltage 120 Input Voltage AC110-240V (50Hz~60Hz) Unit Size (WXHxD m) 090x2100x570 Package Size (WXHxD m) 990x2100x570 Potrim (WXH m) 090x2100x570 Footprint (WXH m) 0120 Gross Weight (kg) 120 Gross Weight (kg) 0°C to 50°C Operating Temperature 0°C to 50°C Operating Humidity 0°C to 50°C Operating Humidity 0°C to 50°C Operating Humidity 10% to 80% Storage Temperature 30°C to 60°C Operating Humidity 0°C to 50°C Oper	AV Inputs	Video		HDMI, VGA
Power Input Voltage AC110~240V (50Hz~60Hz) Input Voltage Unit Size (WxHxD mm) 813x1960x50 Package Size (WxHxD mm) 990x2100x570 Package Size (WxHxD mm) 990x2100x570 Footprint (WxH mm) 813x400 Net Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0 °C to 50 °C Operating Humidity 30% to 80% Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Temperature -0°C to 50°C Operating Humidity 10% to 80% Storage Temperature -0°C to 50°C Operating Humidity 10% to 80% Storage Temperature -0°C to 50°C Operating Humidity 10% to 80% Storage Humidity 10% to 80% Media Resolution 1080x1920 Internal Media RA		Audio		Audio Socket (3.5mm)
Input Voltage AC110-240V (50H2-60H2) Init Size (WxHxD mm) 813x1960x50 Package Size (WxHxD mm) 990x2100x570 Package Size (WxHxD mm) 990x2100x570 NetWeight (kg) 090x2100x570 Rot Weight (kg) 120 Gross Weight (kg) 0°C to 50°C Operating Temperature 0°C to 50°C Operating Humidity 10% to 80% Storage Temperature 0°C to 50% Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Internal Media Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Internal Media Fel GPU Duel-Core Cortex-A9 @1.6GH2 GPU Media Resolution 1080x1920 GRM Internal Media RAM 10B0x1920 GRM Internal Media RAM 10B0x1920 GRM Internal Media RAM 10B0x1920 GRM Internal Media GRM GRM GRM GRM	Power	Power Consumption (W)		120
Package Size (WxHxD mm) 990x2100x570 Footprint (WxH mm) 813x400 Net Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Storage Humidity 10% to 80% Storage Humidity 10% to 60% Weing And Antion Antio Antion Antion Antion Antion Antion Antio Antion An		Input Voltage		AC110~240V (50Hz~60Hz)
Mechanical Footprint (WXH mm) 813x400 Net Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Memory 6GB CPU Duel-Core Cortex-A9 @1.6GHz GPU Mali-400 MP4 @400MHz RAM 10B DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1	Mechanical	Unit Size (WxHxD mm)		813x1960x50
Net Weight (kg) 120 Gross Weight (kg) 136 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Storage Humidity 5% to 95% Storage Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Media GPU Player GPU RAM 1GB DDR3 ROM GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1		Package Size (WxHxD mm)		990x2100x570
Gross Weight (kg) 136 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Internal Media Media Resolution 1080x1920 Internal Media RAM GPU Duel-Core Cortex-A9 @.1.6GHz GPU Mali-400 MP4 @.400MHz GPU GPU Mali-400 MP4 @.400MHz Internal Media RAM GB DDB3 GPU GPU Mali-400 MP4 @.400MHz INB USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi Storage of the mality of the		Footprint (WxH mm)		813x400
Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Media Media Resolution Player GPU RAM 16B DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1		Net Weight (kg)		120
Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Media 6GB CPU Duel-Core Cortex-A9 @1.6GHz GPU Mali-400 MP4 @400MHz RAM 1GB DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1		Gross Weight (kg)		136
Environmental Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Internal Media Media Resolution 1080x1920 [Internal Media GPU Duel-Core Cortex-A9 @1.6GHz GPU Mali-400 MP4 @400MHz RAM 1GB DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1	Environmental	Operating Temperature		0 °C to 50 °C
Operating Humidity 10% to 80% Storage Humidity 5% to 95% Keila Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Media 6GB CPU Duel-Core Cortex-A9 @.1.6GHz GPU Mali-400 MP4 @400MHz RAM 10B DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1		Storage Temperature		-30°C to 60°C
Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1080x1920 Internal Memory 6GB CPU Duel-Core Cortex-A9 @1.6GHz GPU Mali-400 MP4 @400MHz RAM 1GB DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1 Accessories Included Scheduling Software, Remote Control, Key, User Manual		Operating Humidity		10% to 80%
Computer Internal Media Player Media Resolution Internal Memory GGB Internal Media Player GPU Duel-Core Cortex-A9 @1.6GHz GPU RAM 1GB DDR3 1GB DDR3 ROM 8GB NAND USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1		Storage Humidity		5% to 95%
Internal Media Internal Memory Internal Memory Internal Memory Player Internal Media GPU Duel-Core Cortex-A9 @1.6GHz GPU Mali-400 MP4 @400MHz GPU RAM 1GB DDR3 BOM USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1	Computer		Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
Computer CPU Duel-Core Cortex-A9 @1.6GHz Player GPU Mali-400 MP4 @400MHz RAM 1GB DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1			Media Resolution	1080x1920
Computer Internal Media Player GPU Mali-400 MP4 @400MHz RAM 1GB DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1 Accessories Included			Internal Memory	6GB
RAM 1GB DDR3 ROM 8GB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1			CPU	Duel-Core Cortex-A9 @1.6GHz
Computer RoM 8GB NAND Player ROM BOM USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1			GPU	Mali-400 MP4 @400MHz
ROM BGB NAND USB USB2.0 HOST (x2) LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1 Accessories Included			RAM	1GB DDR3
LAN 10/100M Ethernet (Network version screen only) Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1			ROM	8GB NAND
Wi-Fi 802.11b/g/n (Network version screen only) OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1			USB	USB2.0 HOST (x2)
OS Android 4.2.2 Graphic Engine OpenGL ES 1.1/2.0, OpenVG 1.1 Accessories Included			LAN	10/100M Ethernet (Network version screen only)
Included Included OpenGL ES 1.1/2.0, OpenVG 1.1 Accessories Included Scheduling Software, Remote Control, Key, User Manual			Wi-Fi	802.11b/g/n (Network version screen only)
Accessories			OS	Android 4.2.2
Accessories			Graphic Engine	OpenGL ES 1.1/2.0, OpenVG 1.1
Accessories Optional Optional Network Upgrade, Touch Screen Upgrade	Accessories	Included		Scheduling Software, Remote Control, Key, User Manual
		Optional		Network Upgrade, Touch Screen Upgrade


Technical Drawing:






14.5

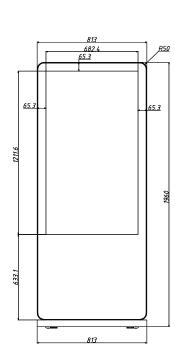





Why Choose Our Commercial Display Solutions?

