55" 4K Slim Bezel Interactive Touch Displays



Interactive whiteboard solution for meeting rooms with integrated annotation and mirroring software

Modern Interactive Whiteboard


The stylish enclosure design really makes this touch screen stand out from the crowd. The bezels are so thin that the display area occupies more than 91% of the overall screen size. Designed with aluminium bezels and a moulded polymer rear, the screen is so lightweight it can even be mounted on a stud wall.




4K Display


The 4K Ultra HD display delivers incredible image quality with four times resolution higher than Full HD. Optimised for viewing distances both near and far the display allows your content to take center stage for all your visual communication.





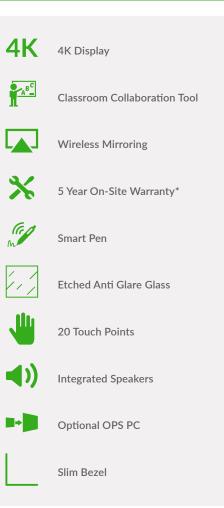

Introducing MEETINGPAD: The Ultimate Collaboration Tool

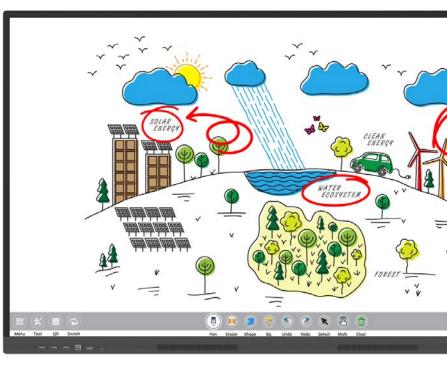

Multi-Device Wireless Mirroring

Wirelessly project the displays of up to four smartphones, tablets, laptops, PCs or Macs. Using mobile devices you can mirror the display in both directions, and even take control of the touch screen. Mirroring via 5GHz allows for fast response, all without the need of external wires or transmitters.



Flexible Working Tools

Personalise your experience by changing the background colour of the display, as well as the colour and thickness of your drawing tools.



Smart Pen Stylus

There are two stylish interactive 'Smart Pens' included. These special styluses allows you to control the display wirelessly from anywhere in the room. You can change the pen tool colour, save annotated documents, navigate through a PowerPoint presentation or website and go back to the 'MeetingPad' home screen.

Easy File Sharing

Once your device is connected you can quickly and easily share documents, videos, images and audio files stored on your smartphone, tablet, laptop or PC directly to the touch screen. You can also share files from the touch screen to your device by scanning a QR code with your mobile or tablet.



Advanced Whiteboard Widgets

The screens feature advanced widgets for the whiteboard including a calendar, timer and a calculator. For drawing more technical diagrams there are rulers and compasses available. There are tools for temporarily hiding information from viewers with our spotlight and curtain widgets.



Up/ Down/Previous/Save

0

Ok/Select

Change Mode

Optional OPS Windows PC


For seamless integration onto existing networks an OPS PC can be installed into the rear of the display, allowing for ultimate flexibility to switch between Android and Windows effortlessly.



Touch Screen Monitor

As well as using the built in Android system these displays can also be used as a touch screen monitor by connecting a PC or laptop via HDMI and USB.

1. Touch USB 2. LAN 3. YPBPR In 4. AV In 5. AV Out 6. VGA Audio In 7. VGA 8. Earphones 9. SPDIF Earphone 10. HDMI In x 2 11. RS-232 12. USB x2



Easy Access Ports and Controls

Quickly and conveniently connect your own laptop or devices to the screen using the front facing HDMI and Touch USB ports. There are also 3 USB ports and a USB-C port for easy access.



Freeze Frame Function

While your laptop is connected you can freeze the image on screen so that you can continue to work independently on your laptop.




20 Touch Points

Ideal for large group collaboration, up to twenty users can interact with the screen simultaneously when working on group projects.



Slim Bezel

The screens feature an extremely sleek and narrow bezel meaning that the enclosure to display area ratio is very low. The front is crafted from segmented aluminium to achieve ultimate precession while the polymer rear keeps the display super slim and lightweight.



Etched Glass

Improves tactility for smoother touch gestures, especially useful for multiple users. The anti-glare nano coating also diffuses external light improving optical clarity.





Integrated Speakers

The screens have two integrated super slim 20W speakers for presentations that include an audio element.



20W x 2 Integrated Speak

Key Features




Specification Table

Colour Depth Outsing Angle Verying Angle 10 Bit Contrast Ratio 178° Contrast Ratio 80.000 Hours Infegen 80.000 Hours Touch Technology Infrared Touch Technology Infrared Gass Thickness 4mm Response Time 38ms Touch Point Accuracy 4mm Audio Speaker Type Port Point Accuracy USB X-3, HDMI-In, Touch USB, USB Type-C Response Time USB X-3, HDMI-In, Touch USB, USB Type-C Response Time USB X-3, HDMI-In, Touch USB, USB Type-C Response Time USB X-3, HDMI-In, Touch USB, USB Type-C Response Time USB X-3, HDMI-In, Touch USB, USB Type-C Power Power Storpply ACC110-240V (SOH=-60Hz) Power Consumption 70W Touch X-30X Mechanical Very Storpply ACC110-240V (SOH=-60Hz) Power Storpply Power Storpply ACC110-240V (SOH=-60Hz) Power Storpply Power Storpply ACC110-240V (SOH=-60Hz) Power Storpply Power Storpply <t< th=""><th></th><th></th><th>55 Inch</th></t<>			55 Inch
Appect Ratio 6 Appect Ratio 6 Appect Ratio Bightness (cd/m²) 0.000 Colour Depth 0.010 1.07G colors Colour Depth 0.010 1.07G colors Versing Angle 0.0000 Hours 0.0000 Hours Totach Technology 0.0000 Hours 0.0000 Hours Totach Technology 0.0000 Hours 0.0000 Hours Glass Thickness 0.0000 Hours 0.0000 Hours Glass Thicknes 0.0000 Hours 0.0000 Hours Totach Debrit Accuracy 0.0000 Hours 0.0000 Hours Marcia Speaker Time 0.0000 Hours Varia Speaker Time 0.0000 Hours Varia Speaker Time 0.0000 Hours Varia Speaker Type 0.0000 Hours Varia Power Songer Type 0.0000 Hours Varia Varia Site Works Dimin 0.0000 Hours	Panel	Resolution	3840x2160
Brightness (cd/m ²) 500 Colour Guir 0.0007 Golors Colour Opeth 0.0107 Golors Verwing Angle 0.0107 Golors Contrast Ratio 0.0000 Hours Tuckh Technology 0.0000 Hours Gast Ratio 0.0000 Hours Gast Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Gast Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Gast Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Gast Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Gast Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Gast Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours Mask St Nachonesy 0.000 Hours		Display Area (mm)	1207.6x678.5
Annel Colour Colour Depth 1.07G colors Colour Depth 10 Bit 10 Bit Vexing Angle 10 Bit 10 Bit Contrast Ratio 10 Bit 10 Bit Utespan 80.000 Hours 10 Bit Totch Points 80.000 Hours 10 Bit Outer Totch Points 80.000 Hours Totch Points 20 (10 TourhPoints Im MeetingPad Software) Outer Points 10 Bit 20 (10 Tourh Points Im MeetingPad Software) Outer Points Couch Points Im MeetingPad Software) 10 Bit Outer Points MeetingPad Software) 10 Bit Outer Point Accuracy 4 mm 10 Bit V Ports Front Ports US 83, HOM-In Youch USB, USB Type-C Werer Power Consumption 70W Outer Power Consumption 70W Power Consumption 70W 10 Bit Accuracy Very Bit (kg) 10 Stat Point Accuracy 10 Bit Accuracy Very Bit (kg) Stat Point Accuracy 70W Bower Consumption 70W		Aspect Ratio	16:9
Colour Depth In the instance of the in		Brightness (cd/m ²)	500
Viewing Angle Viewing Angle Quirtast Ratio 4.000-1 Contrast Ratio 4.000-1 Uted Technology 0.000 Hours Touch Points Technology Gasch Nickness 4.000-1 Response Time 20 (10 Touch Points in MeetingPad Software) Outer Point Accuracy 4.000 Worts Front Point 4.000 Worts Front Ports 1.000 Power Soupply HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, USB Type C North Power Soupply AC110-240V (SOHz-GOHz) Power Soupply HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, USB Type C, USB X3, ED Power Soupply HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, USB Type C, USB X3, ED Power Soupply Power Soupply AC110-240V (SOHz-GOHz) Power Soupply HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, USA X4, VGA, VGA, NAV OU, VPBP, RS232, RAPS, ED Power Soupply Footage Statemply AC110-240V (SOHz-GOHZ) Power Soupply Init Size (Workb Dmm) 1.0262x745x82.1 Power Soupply Init Size (Workb Dmm) 1.0262x745x82.1 Power		Colour	1.07G colors
Contrast Ratio 4.000:1 Lifespan 80.000 Hours Fouch Technology Infrared Touch Points 20 (10 Touch Points in MeetingPad Software) Gatas Thickness 4.000:1 Response Time 38ms Touch Points sems Vuloit Speaker Type Vuloit Speaker Type Vu Ports Front Ports Power Supply ACConsumption Power Consumption 7000 Power Supply ACCON-2400 (SpHz-60Hz) Power Consumption 700V Power Supply ACCON-2400 (SpHz-60Hz) Power Supply AC		Colour Depth	10 Bit
Lifespan Bit Idespan Fuch Technology Infrared Touch Technology Infrared Glass Thickness 20 (10 Touch Points in MeetingPad Software) Glass Thickness 4mm Response Time 38ms Touch Point Accuracy 41mm Vuloi 5packer Type 2 x 20W Worts Frant Ports UDUI-In x2, USB 23, HDMI-In, Touch USB, VSG ALOUS ID, NA VOULY VPDP, RS323, RJ45, E Wort Rear Ports HDMI-In x2, USB(2.0) x1, USB (3.0) x1, Touch USB, VGG ALOUS ID, NA VOULY VPDP, RS323, RJ45, E Wort Sosumption 70W Packag Size (Workh2D mm) 2 LS22/OX (SGA ALOUS ID, NA VOULY VPDP, RS323, RJ45, E Wort Consumption 70W 2 LS23/SOSA82.1 Week Size (Workh2D mm) 103/44x924x180 2 LS2 VESA Holes (mm) 103/44x924x180 2 LS2 Worts Weight (kg) 3 S.25 2 LS2 Torse Weight (kg) 3 S.25 2 LS2 Correaring Temperature -00°C to 60°C 2 LS2 Torse Humidity 101% to 90% 2 LS2 Corgant Humidity 101		Viewing Angle	178°
Touch Technology Infrared Touch Points Touch Points 100 Touch Points in MeetingPad Software) Ouch Gass Thickness 4mm Response Time 58ms Touch Point Accuracy 41mm udio Speaker Type 2 x 20W V Ports Front Ports USB x3, HDMI-In, Touch USB, USB Type-C Response Time HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, VCA, VCA Audio In, AV In, AV Out, YPbPr, R5232, RJ45, E ower Power Supply AC110-240V (SDH2-60H2) Power Consumption 70W Peckage Size (WXHxD mm) 1262x763x82.1 Package Size (WXHxD mm) 1262x763x82.1 Package Size (WXHxD mm) 1264x7924x180 VES Holes (mm) 400x400 Net weight (kg) 35.25 Gross Weight (kg) 35.25 Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Humidity 10% to 90% Graphic Engine Mali-G52 MP2(2EE) RAM 4GB		Contrast Ratio	4,000:1
Touch Points Touch Points Ouch Point Glass Thickness 4mm Response Time 6ms 6ms Touch Point Accuracy 6ms 6ms udio Speaker Type 2x 20W VPorts Font Ports USB x3, HDMI-In, Touch USB, USB Type-C Rear Ports HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, VGA, VGA Audio In, AV Out, YPbPr, RS232, RJ45, E Yower Power Consumption 7000 Power Consumption 7000 Yower Consumption 7000 Yex (WAHXD mm) 12622x73x82.1 Yex (Wafk Dam) 13644x924x180 Yex (Wafk Dam) 26.7 Yex (Wafk Dam) 6ms Yex (Wafk Dam) 26.7		Lifespan	80,000 Hours
Glass Thickness 4mm Response Time 38ms Touch Point Accuracy 4mm udio Speaker Type 2 x 20W Worts Front Ports USB x3, HDMI-In, Touch USB, USB Type-C WPorts Power Supply HDMI-In x2, USB(2,0) x1, USB(3,0) x1, Touch USB, USA, VGA Audio In, AV In, AV Out, YPDPR, RS232, RJ45, E Worts Power Consumption AC110-240V (SoHz-60Hz) Power Consumption AC110-240W (SoHz-60Hz) VESA Holes (mm) AC110-240W (SoHz-60Hz) VeSA Holes (mm) AC110-240X (SoHz-60Hz) Vesa Weight (kg) AC10-1010% to	Touch	Touch Technology	Infrared
Response Time s8ms Touch Point Accuracy inch Point Accuracy sudio Speaker Type 2 x 20W W Ports Front Ports USB x3, HDMI-In, Touch USB, USB Type-C Rever Supply HDMI-In x2, USB(2,0) x1, USB(3,0) x1, Touch USB, VGA, VGA Audio In, AVI n, AV Out, YPDPr, RS232, RJ4S, E Power Consumption 70W Power Consumption 70W Veface Size (WXHxD mm) 1265x765x82.1 Poscage Size (WXHxD mm) 1364x924x180 VESA Holes (mm) 400x400 VeSA Holes (mm) 400x400 Net weight (kg) 2.6.7 Gross Weight (kg) 35.25 Operating Temperature -0.0°C to 50 °C Storage Temperature -0.0°C to 60°C Operating Temperature -0.0°C to 50 °C Graphic Engline Madd Add -0.0°C to 60°C Torage Humidity 100% to 90% Storage Temperature -0.0°C to 60°C		Touch Points	20 (10 Touch Points in MeetingPad Software)
Touch Point Accuracy ±1mm uudio Speaker Type 2 x 20W W Ports Front Ports USB x3, HDMI-In, Touch USB, USB Type-C Rar Ports HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, GA, VGA Audio In, AV Out, YPbPr, RS232, RJAS, E rower Power Supply AC110-240V (50Hz-60Hz) rower Power Sonumption 70W Power Sonumption 70W 70W Package Size (WxHxD mm) 1262x763x82.1 Package Size (WxHxD mm) 1262x763x82.1 Power Sonumption 6000000000000000000000000000000000000		Glass Thickness	4mm
udioSpeaker Type2 x 20WVP ortsFont PortsUSB x3, HDMI-In, Touch USB, USB Type-CRear PortsHDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, VGA, VGA Audio In, AV Un, AV Out, YPDPr, RS232, RJ45, EowerPower SupplyAC110-240V (50Hz-60Hz)Power Consumption70WPackage Size (WxHxD mm)1262x763x82.1Package Size (WxHxD mm)1364x924x180VESA Holes (mm)4000x400Net Weight (kg)26.7Gross Weight (kg)35.25Operating Temperature-10°C to 50 °CStorage Temperature-20°C to 60°COperating Humidity10% to 90%Storage Temperature-20°C to 60°COperating Humidity10% to 90%Storage Temperature-20°C to 50°CStorage Temperature-20°C to 50°CUSBUSBCPUQuad-core ARM Cortex-A55RAM4GBGraphic EngineMali-G52 MP2(2EE)Hard Drive/Internal Memory (eMMC)32GBUSBUSB 2.0 x2LAN10/100 EthernetVi-Fi2.4G/5G bullt-in WifiOsAndroid 11OsAndroid 11Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		Response Time	≤8ms
IV Ports Front Ports USB x3, HDMI-In, Touch USB, USB Type-C Nower Power Supply AC110-240V (S0Hz-60Hz) Power Consumption 70W Init Size (WXHXD mm) 1262x763x82.1 Package Size (WXHXD mm) 1364x924x180 VEGA Holes (mm) 400x400 Net Weight (kg) 26.7 Gross Weight (kg) 35.25 Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Tempe		Touch Point Accuracy	±1mm
IV Ports Front Ports USB x3, HDMI-In, Touch USB, USB Type-C NV Ports Hear Ports HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, VGA, VGA Audio In, AV In, AV Out, YPDPr, RS232, RJ45, E Power Power Consumption 70W Power Consumption 70W Package Size (WXHxD mm) 1262x763x82.1 Package Size (WXHxD mm) 1364x924x180 VESA Holes (mm) 400x400 Net Weight (kg) 26.7 Gross Weight (kg) 35.25 Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storag	Audio	Speaker Type	2 x 20W
Rear PortsHDMI-In x2, USB(3.0) x1, USB(3.0) x1, Touch USB, VGA, VGA Audio In, AV Din, AV Din, VP Dip, RS232, RJA E, EPowerPower SupplyCAC110-240V (SOHz-60Hz)Power ConsumptionOWTOWPower ConsumptionOWTOWAuge Size (WxHxD mm)CAC110-240V (SOHz-60Hz)Package Size (WxHxD mm)CAC110-240V (SOHz-60Hz)Package Size (WxHxD mm)CAC110-240V (SOHz-60Xe2)Package Size (WxHxD mm)CAC110-240V (SOHZ)Package Size (WxHxD mm)CAC110-240V (SOHZ)<	AV Ports		USB x3, HDMI-In, Touch USB, USB Type-C
PowerPower Consumption70WPower Consumption70WUnit Size (WXHxD mm)1262x763x82.1Package Size (WXHxD mm)1364x924x180VESA Holes (mm)400x400Net Weight (kg)26.7Gross Weight (kg)35.25Operating Temperature-10°C to 50 °CStorage Temperature-20°C to 60°COperating Humidity10% to 90%Storage Humidity10% to 90%CPUQuad-core ARM Cortex-A55RAMCPUGraphic EngineMali-G52 MP2(2EE)Hard Drive/Internal Memory (eMMC)32GBUSBUSB 2.0 x2LAN10/100 EthernetWi-Fi2.4G/5G built-in WifiOSAndroid 11AccessoriesIncludedUser Manual (CD), Remote Control, Power Cable, 3m LNS AMale to USB B Male Cable Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa			HDMI-In x2, USB(2.0) x1, USB(3.0) x1, Touch USB, VGA, VGA Audio In, AV In, AV Out, YPbPr, RS232, RJ45, Earphone, SPE
Power ConsumptionPower ConsumptionPower Consumption70WUnit Size (WxHxD mm)1262x763x82.1Package Size (WxHxD mm)1364x924x180VESA Holes (mm)400x400Met Weight (kg)26.7Gross Weight (kg)35.25Operating Temperature-10°C to 50°CStorage Temperature20°C to 60°COperating Humidity0Storage Humidity0Storage Humidity0Power Consumption10% to 90%Graphic Engine20°C to 60°CMah4GBGraphic Engine4GBGraphic Engine32GBIndued Dive/Internal Memory (eMMC)32GBUSB A Male to USB A Male coldCecessoriesIncludedUser Manual (CD), Remote Control, Power Cable, 3m LNG Cable, 3m LSB A Male to USB B Male CableCable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa30°C	Power	Power Supply	AC110~240V (50Hz~60Hz)
Package Size (WXHXD mm) 1364x924x180 Mechanical VESA Holes (mm) 400x400 Net Weight (kg) 26.7 Gross Weight (kg) 35.25 Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Humidity 200 Quad-core ARM Cortex-AS5 RAM CHU Graphic Engine Mali-GS2 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi CACCOS Android 11 OS Android 11 Catege Android CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cabl Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		Power Consumption	70W
Mechanical VEX A Holes (mm) 400x400 Net Weight (kg) 26.7 Gross Weight (kg) 35.25 Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Humidity 00x400 CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Vi-Fi CS Android 11 Ccessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cable	Mechanical	Unit Size (WxHxD mm)	1262x763x82.1
Net Weight (kg)26.7Gross Weight (kg)35.25Operating Temperature-10°C to 50 °CStorage Temperature-20°C to 60°COperating Humidity10% to 90%Storage Humidity0Storage Humidity10% to 90%Storage Humidity0Operating Humidity10% to 90%Storage Humidity0Storage Humidity <t< td=""><td>Package Size (WxHxD mm)</td><td>1364x924x180</td></t<>		Package Size (WxHxD mm)	1364x924x180
Gross Weight (kg) 35.25 Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Humidity 10% to 90% Storage Humidity 00 Storage Humidity 10% to 90% CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi Cos Os Android 11 Necessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cabl Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		VESA Holes (mm)	400x400
Operating Temperature -10°C to 50 °C Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Humidity 10% to 90% Storage Humidity 10% to 90% CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Vi-Fi 2.4G/5G built-in Wifi OS Android 11 Kaccessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cabl Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Walk		Net Weight (kg)	26.7
Storage Temperature -20°C to 60°C Operating Humidity 10% to 90% Storage Humidity 10% to 90% Storage Humidity 10% to 90% CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11		Gross Weight (kg)	35.25
Invironmental Operating Humidity 10% to 90% Storage Humidity 10% to 90% Storage Humidity 10% to 90% CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 Accessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cabl Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa	Environmental	Operating Temperature	-10°C to 50 °C
Operating Humidity 10% to 90% Storage Humidity 10% to 90% CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 Accessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cabl Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		Storage Temperature	-20°C to 60°C
CPU Quad-core ARM Cortex-A55 RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 kccessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cable		Operating Humidity	10% to 90%
RAM 4GB Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 Vaceessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cable Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Water		Storage Humidity	10% to 90%
Graphic Engine Mali-G52 MP2(2EE) Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi OS Android 11 User Manual (CD), Remote Control, Power Cable, 3m USB A Male to USB B Male Cable Accessories Included	Computer	CPU	Quad-core ARM Cortex-A55
Hard Drive/Internal Memory (eMMC) 32GB USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 Accessories Included User Manual (CD), Remote Control, Power Cable, 3m USB A Male to USB B Male Cable Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Walk		RAM	4GB
USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 kccessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cable		Graphic Engine	Mali-G52 MP2(2EE)
USB USB 2.0 x2 LAN 10/100 Ethernet Wi-Fi 2.4G/5G built-in Wifi OS Android 11 Nuccessories Included		Hard Drive/Internal Memory (eMMC)	32GB
Wi-Fi 2.4G/5G built-in Wifi OS Android 11 Naccessories Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cable Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Ward Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x2), Smart Pen (x2)		USB	USB 2.0 x2
OS Android 11 uccessories User Manual (CD), Remote Control, Power Cable, 3m USB A Male to USB B Male Cable Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		LAN	10/100 Ethernet
Included User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cabl Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		Wi-Fi	2.4G/5G built-in Wifi
ccessories Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wa		OS	Android 11
	Accessories	Included	User Manual (CD), Remote Control, Power Cable, 3m LAN Cable, 3m USB A Male to USB B Male Cable, 3m HDMI Cable, Wi-Fi Aerial (x3), Pointer, Magnetic Whiteboard Pen (x 2), Smart Pen (x1), Batteries x2, Wall Mount
		Optional	Floor Stand/Trolley, Ceiling Mount, PushShare Dongle
Warranty Period 5 Year Onsite Warranty (UK Mainland Only)	Warranty	Warranty Period	5 Year Onsite Warranty (UK Mainland Only)
Varranty Technical Support Lifetime		Technical Support	Lifetime

Errors and omissions excepted



Technical Drawing

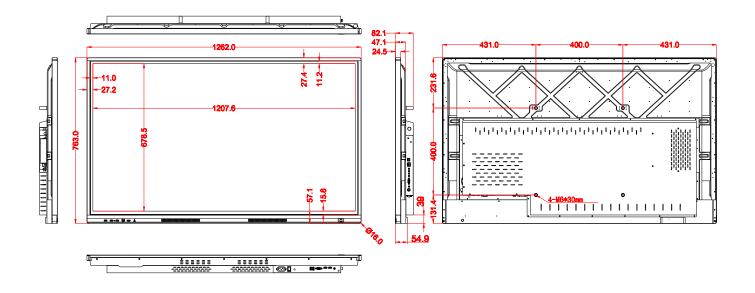

Why Choose Our Commercial Display Solutions?

