Indoor DV-LED Freestanding Totems P2.5



Maximize visibility, flexibility, and engagement with our all-in-one DV-LED totem solution

Freestanding DV-LED Totem



Effortless Installation & Maintenance

Installing these freestanding displays is a lot simpler than wall mounted counterparts. No matter what your level of experience with DV-LED solutions, installing and maintaining these displays couldn't be easier saving time and money.



Small Footprint Totems

With a depth of 297mm our totem units don't take up valuable floorspace. This opens up more possibilities of where the totems can be placed. Even better the ultra slim DV-LED cabinets make the perceived depth of the units even smaller.



297mm Depth

Protective Rear Enclosure

Our DV-LED freestanding totems look great from any angle for a full 360° experience. The rear of the totems has a glossy black finish and are neat in design, hiding any messy cables and fixtures inside the discrete internal locker.

> Discrete Internal Locker



Update Content Remotely

Publish and monitor content from anywhere in the world via the internet using our own cloud-based CMS software, which is designed to be cost-effective and user-friendly. Plus, avoid the hassle associated with coordinating multiple suppliers by sourcing hardware and software from one place.



Ultra-Quiet Operation

These DV-LED totems do not require cooling fans due to their super low heat emissions. Not only does this allow them to run silently, which is especially important in indoor spaces, it also makes them more robust and reliable as there are no moving parts.



Easy Manoeuvrability

Thanks to the integrated swivel castors, these displays offer a portable solution that can be be moved around. This is particularly useful for businesses that may want to change the layout of their space frequently or for events and promotions that require temporary placement.



Captivating Image Quality

Integrated Castors

By utilising state-of-the-art SMD technology and advanced video processing, these displays really bring content to life by delivering crystal clarity and lifelike colours without any distortion. This is coupled with rapid refresh rates to ensure seamless content playback.




High Brightness Version Available

For our Freestanding DV-LED Totems we can offer two brightness options. One is a standard 550cd/m² that is perfect for commercial indoor spaces. We also offer a 2,200cd/m² variation that is optimised more for window displays



Key Features

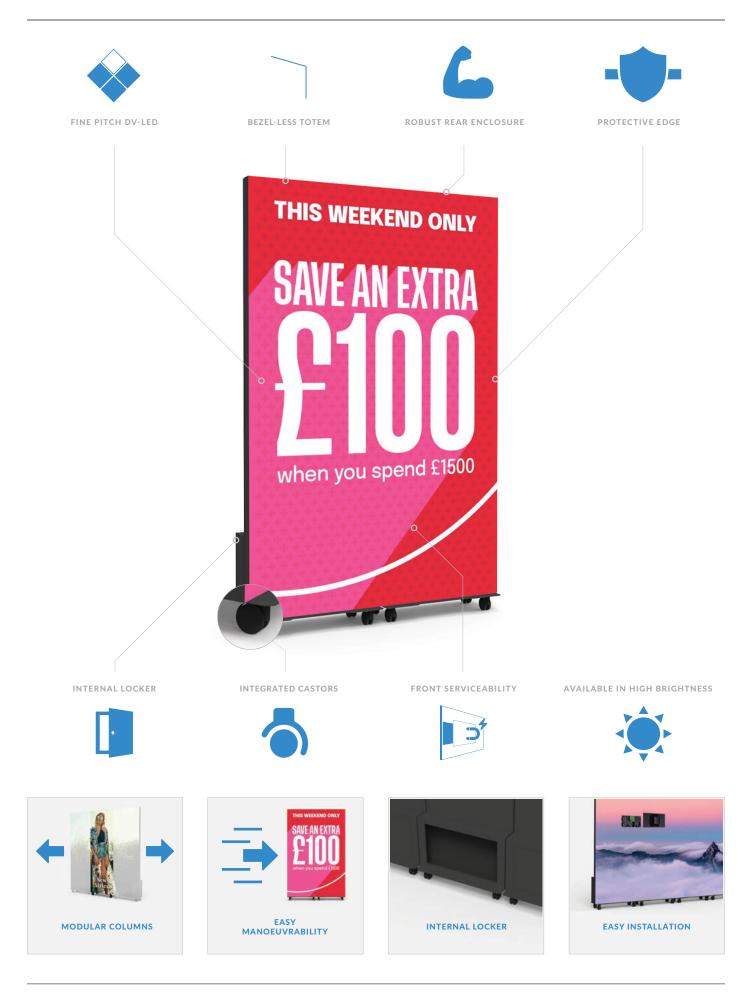

Specification Table

| | Columns | 1x | 2x | Зx | 4x | 5x | 6x | 7x |
|---------------|-------------------------------|---|---------------|---------------|---------------|---------------|---------------|--------------|
| | Display Size | 80" | 91" | 107" | 126" | 147" | 169" | 192" |
| LED Display | Display Area (WxHmm) | 640x1920 | 1280x1920 | 1920x1920 | 2560x1920 | 3200x1920 | 3840x1920 | 4480x1920 |
| | Resolution (px) | 256x768 | 512x768 | 768x768 | 1024x768 | 1280x768 | 1536x768 | 1792x768 |
| | Aspect Ratio | 1:3 | 2:3 | 1:1 | 4:3 | 5:3 | 2:1 | 7:3 |
| | Pixel Pitch (mm) | P2.5 | | | | | | |
| | LED Type | SMD2121 | | | | | | |
| | Pixel configuration | 1R1G1B | | | | | | |
| | Brightness (Calibrated) | 550cd/m² (2,200cd/m² High Brightness Version Available) | | | | | | |
| | Refresh rate | 3840Hz | | | | | | |
| | Contrast Ratio | 6,500:1 | | | | | | |
| | Viewing Angle - Horizontal | 170° | | | | | | |
| | Viewing Angle - Vertical | 170° | | | | | | |
| | Processing | 12 bit | | | | | | |
| | Frame rate | 60 fps | | | | | | |
| | Maintenance | Front Service | | | | | | |
| Mechnical | Unit Size (mm) (WxHxD) | 640x2010x300 | 1280x2010x300 | 1920x2010x300 | 2560x2010x300 | 3200x2010x300 | 3840x2010x300 | 4480x2010x30 |
| | Net Weight (kg) | 83.3 | 166.6 | 249.9 | 333.2 | 416.5 | 499.8 | 583.1 |
| Power | Input Voltage | AC220/110 ± 10%, 47~63Hz | | | | | | |
| | Average Power Consumption (W) | 144 | 276 | 408 | 540 | 672 | 804 | 936 |
| Environmental | IP Rating | IP40 | | | | | | |
| | Operating Temperature | -10°C to +60°C | | | | | | |
| | Operating Humidity | 10% to 80% | | | | | | |
| | Lifetime | 100,000 hours | | | | | | |
| Computer | Media Formats | Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) | | | | | | |
| | Media Resolution | 1920x1080/1080x1920 | | | | | | |
| | Internal Memory | 32GB | | | | | | |
| | CPU | Quad-Core Cortex-A17@1.61GHz | | | | | | |
| | GPU | Mali-T760 MP4 @600MHz | | | | | | |
| | RAM | 4GB DDR3 | | | | | | |
| | USB | USB2.0 HOST (x4) | | | | | | |
| | LAN | 10/100Mb/s Ethernet | | | | | | |
| | Wi-Fi | 802.11b/g/n | | | | | | |
| | OS | Android 7.1 | | | | | | |
| | Graphic Engine | OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1 | | | | | | |
| Package | Included | Totem Frame, DV-LED Cabinets, DV-LED Controller, PPCNET-D Media Player | | | | | | |
| | Optional | TBC | | | | | | |
| Warranty | Warranty Period | 3 Year Warranty | | | | | | |
| | Technical Support | | | | Lifetime | | | |

Why Choose Our Commercial Display Solutions?

