55" Android Freestanding Digital Posters



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.



Giant Freestanding Tablet

Their tempered glass face, rounded corners, super slim profile and aluminium surround all add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.







24/7 Commercial Use



Integrated Android Media Player



Plug and Play



Network Upgrade



Integrated Speakers



Free Integrated Castors



Low Power Consumption



Internal Locker/AV Inputs



Wide Viewing Angle



White Version Available

450cd/m² IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature in portrait orientation.




Free Scheduling Software

These displays come with free scheduling software for displaying different content at different times of the day. If you prefer to keep it simple you can update the screen directly without using the software.



Internal Locker

Should you need to run the screen from an external source, like a PC or media player, you can do so by using the HDMI input or the VGA and 5mm audio jack inputs. There is also a space to fit a small PC or media player inside the lockable compartment.

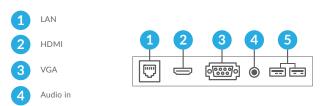

Free Integrated Castors

2 x USB

These freestanding displays are a fully potable solution as they feature integrated castors as well as retractable feet for more permanent installations.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.



Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



Scrolling Text

You can display a "ticker tape" style scrolling text message along the bottom of the screen, to help you get your message across or help highlight any specific promotions or offers.



Tickets now available online at www.shrewsburyfood

lable online at www.shrewsburyfoodfestival.com

Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.











IPS PANEL

24/7 COMMERCIAL GRADE







CONNECT DEVICES



LED BACKLIGHT

OPTIONAL NETWORK UPGRADE
















Specification Table


Resolution 1920x1080 19	
Panel Display Area (mm) 682.4x1211.6 Aspect Ratio 16:9 Brightness (cd/m²) 450 Colour 16.7M Viewing Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 6W, 8Ω (x2) AV Inputs Video HDMI, VGA Audio Audio Socket (3.5mm) Power Power Consumption (W) 120 Input Voltage AC110-240V (50Hz-60Hz) Mechanical Fox Expert (WxHxD mm) 813x1965x50 Package Size (WxHxD mm) 940x2110x535 Mechanical Fox Deprint (WxH mm) 813x4400 Met Weight (kg) 87 Gross Weight (kg) 95 Storage Temperature 0 °C to 50 °C Operating Temperature 30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MPA, RM. RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Panel Aspect Ratio 16:9 Panel Brightness (cd/m²) 450 Colour 16.7M Viewing Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 6W, 8Ω (x2) AV Inputs HDMI, VGA Audio Audio Socket (3.5mm) Power 120 Input Voltage AC110-240V (50Hz-60Hz) Input Voltage AC110-240V (50Hz-60Hz) Mechanical Foxprint (WxH mm) 813x1965x50 Package Size (WxHxD mm) 940x2110x535 Mechanical Foxprint (WxH mm) 813x400 Met Weight (kg) 87 Gross Weight (kg) 95 Environmental Operating Temperature 0 °C to 50 °C Environmental Operating Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Panel Brightness (cd/m²) 450 Colour 16.7 M Viewing Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 6W, 8Ω (x2) Author HDMI, VGA Audio Audio Socket (3.5mm) Power Power Consumption (W) 120 Input Voltage AC110-240V (50Hz~60Hz) Mechanical Footprint (WxHzD mm) 813x1965x50 Package Size (WxHxD mm) 813x400 Mechanical Footprint (WxH mm) 813x400 Met Weight (kg) 95 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Colour 16.7M Viewing Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 6W, 8Ω (x2) Audio Audio Socket (3.5mm) Power	
Viewing Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 6W, 8Q (x2) Audio HDMI, VGA Audio Audio Socket (3.5mm) 120 Power Input Voltage AC110~240V (50Hz~60Hz) Input Voltage AC110~240V (50Hz~60Hz) Mechanical Footprint (WxHz mm) 813x1965x50 Package Size (WxHxD mm) 940x2110x535 Mechanical Footprint (WxH mm) 813x400 Met Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Audio Speaker Type 6W, 8Ω (x2) AV Inputs Yideo HDMI, VGA Audio Socket (3.5mm) Audio Socket (3.5mm) Power Power Consumption (W) 120 Input Voltage AC110~240V (50Hz~60Hz) Mechanical Package Size (WxHxD mm) 813x1965x50 Package Size (WxHxD mm) 940x2110x535 Footprint (WxH mm) 813x400 Net Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Audio Speaker Type 6W, 8Ω (x2) AV Inputs Yideo HDMI, VGA Availed Audio Socket (3.5mm) Audio Socket (3.5mm) Power Consumption (W) 120 Input Voltage AC110~240V (50Hz~60Hz) Mechanical Environmental Section (WxHxD mm) 813x1965x50 Package Size (WxHxD mm) 940x2110x535 Footprint (WxH mm) 813x400 Net Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Video	
Audio Audio Socket (3.5mm) Power Consumption (W) 120 Input Voltage AC110~240V (50Hz~60Hz) Mechanical Footprint (WxH xmm) 940x2110x535 Footprint (WxH mm) 813x400 Net Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0°C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Power Consumption (W) 120	
Input Voltage	
Input Voltage	
Mechanical Package Size (WxHxD mm) 940x2110x535 Mechanical Footprint (WxH mm) 813x400 Net Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Mechanical Footprint (WxH mm) 813x400 Net Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Net Weight (kg) 87 Gross Weight (kg) 95 Operating Temperature 0 °C to 50 °C Storage Temperature -30 °C to 60 °C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Gross Weight (kg) 95 95	
Operating Temperature 0 °C to 50 °C Storage Temperature -30 °C to 60 °C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BM	
Media Resolution 1920x1080/1080x1920	ИР, PNG)
Internal Memory 6GB	
CPU Quad-Core Cortex-A17@1.61GHz	
GPU Mali-T760 MP4 @600MHz	
RAM 2GB DDR3	
Computer ROM 8GB NAND	
USB USB2.0 HOST (x2)	
LAN 10/100M Ethernet (Network Version Only)	
Wi-Fi 802.11b/g/n/ac (Network Version Only)	
OS Android 5.1.1	
Graphic Engine OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1	
Included Scheduling Software, Remote Control, Key, User Manual	
Accessories Optional Network Upgrade, Touch Screen Version	
Warranty Period 3 Year Warranty	
Warranty Technical Support Lifetime	






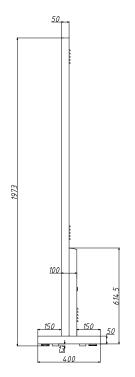

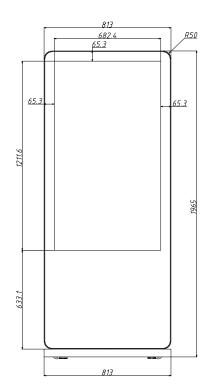



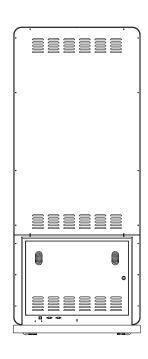

Why Choose Our Commercial Display Solutions?



Lifetime Technica Support From the moment you receive your product, throughout the duration of your warranty and even after your warranty has expired we are here to support you. If you require any assistance setting up or using your product, or have any problems at all, we can provide free technical support via telephone and email.



On-site Support and Maintenance

If needed, we can provide an installation service for any of our products. We can also set up service-level agreements for larger projects that require maintenance contracts.



Extended Warranty*

All of our commercial display products come with a 3 year commercial warranty as standard but if you want to extend this you can upgrade this to cover a 5 year period at point of purchase.



Training

As well as providing free remote CMS training sessions and webinars we can also visit you to deliver bespoke training for our software and hardware*.



Advanced Replacements[†] Should your display suffer from any kind of hardware failure during the warranty period we will send you an advanced replacement and arrange for your old display to be collected, free of charge. This ensures no downtime where you are without a screen.



Custom Product
Testing &
Configuration

If you need us to test third party software or a website, or configure your screen in a particular way before it is dispatched (e.g. in a particular orientation or network mode), we can do so to make your life easier.



3D Rendering

Want to know how a particular screen will look once installed? Send us a photo of the location and we will create a 3D rendering of any screen in situ to help you to visualise how amazing it will look.



Logistics Support

We hold more stock in our UK warehouse than any other manufacturer so we can help you meet tight deadlines. For last minute orders we can also offer special express or morning delivery options*. We also carry out UK based quality control checks on every display before it leaves our warehouse.



Project Support

If you need to loan a sample unit to test we'd be more than happy to arrange this. We can also provide a rental service for temporary projects*.



Customisation*

Your display can be customised to suit your requirements by adding your logo or printed graphics or even tailoring the colour of a display. We can also carry out hardware modifications to existing products or manufacture bespoke solutions for special projects.



As well as being able to provide accessories and add-ons, such as extra remote controls, NUC PCs and video wall controllers, we can also supply custom made flight cases which are great if a display needs to be moved safely from place to place.